



## MPA 15-12 12V-15Ah - Cyclic AGM battery

### Electrical Specifications

Nominal Voltage	12	V
Nominal capacity (C/20)	15	Ah
Capacity at 20° C to 1.75Vpc	20 hour rate	15 Ah
	10 hour rate	14 Ah
	5 hour rate	13 Ah
	3 hour rate	12,5 Ah
	1 hour rate	10 Ah
Current versus time in minutes	75A	- Minutes
	25A	- Minutes
	20A	- Minutes
	15A	- Minutes
	8A	- Minutes
Shelf life without recharge @ 20° C	6	Months
Internal resistance	12	mΩ

### Other Specifications

Cycle life 50% DoD	600	Cycles
Cycle life 75% DoD	380	Cycles
Dimensions	LxWxH	151x99x98 mm
	Total height	98 mm
Operating temperature	-20 to 50	°C
Separator	Random Glass Matt, S wrapped	
Grid alloy	Pb - Ca - AL	
Case and cover	ABS	
Vent	Self Sealing	
Electrolyte	Fixed	
Terminal	F2 (6,36 x 7,8 Lip)	
Torque setting	-	
Weight	4,5	kg


### General Features

- International standard footprint
- Valve regulated cells
- Low internal resistance
- High initial capacity
- Non hazardous

### Typical Applications

- Wheelchairs
- Scooters, 3 and 4 wheels
- Electric cars
- Cleaning machines
- Personal carriers
- Utility vehicles

### Battery life under Cyclic Use

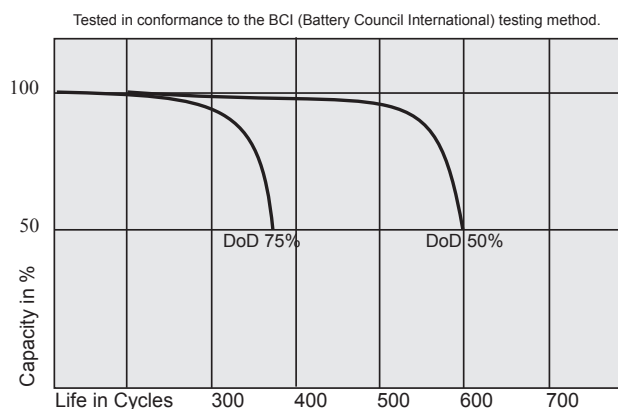

### Battery Charging

- Charging Voltage max 2,46 Vpc (2,65 Vpc <10% Inom), Float charge 2,27 – 2,3 Vpc
- Maximum charging current for MPA 12-12 = 4,3Amp
- Minimum charging current for MPA 12-12 = 1,5Amp

### Cycle life

- To maximise the cycle life of the battery, we recommend to charge the battery fully after use.
- The total cycle life is very dependent on the correct charge and depth of discharge (DoD)!