



## MPA 34-12 12V-34Ah - Cyclic AGM battery

### Electrical Specifications



Nominal Voltage	12	V
Nominal capacity (C/20)	34	Ah
Capacity at 20° C to 1.75Vpc	20 hour rate	34 Ah
	10 hour rate	29 Ah
	5 hour rate	26 Ah
	3 hour rate	24 Ah
	1 hour rate	18 Ah
Current versus time in minutes	75A	7 Minutes
	25A	32 Minutes
	20A	54 Minutes
	15A	79 Minutes
	8A	175 Minutes
Shelf life without recharge @ 20° C	9	Months
Internal resistance	8	mΩ

### Other Specifications



Cycle life 50% DoD	650	Cycles
Cycle life 75% DoD	380	Cycles
Dimensions	LxWxH	196x131x160 mm
	Total height	160 mm
Operating temperature	-20 to 50	°C
Separator	Random Glass Matt, S wrapped	
Grid alloy	Pb - Ca - AL	
Case and cover	ABS	
Vent	Self Sealing	
Electrolyte	Fixed	
Terminal	Insert M6	
Torque setting	5 - 7	Nm
Weight	10,5	kg

### General Features



- International standard footprint
- Valve regulated cells
- Low internal resistance
- High initial capacity
- Non hazardous
- Lifting handle

### Typical Applications




- Wheelchairs
- Scooters, 3 and 4 wheels
- Electric cars
- Cleaning machines
- Personal carriers
- Utility vehicles

### Battery life under Cyclic Use



Tested in conformance to the BCI (Battery Council International) testing method.

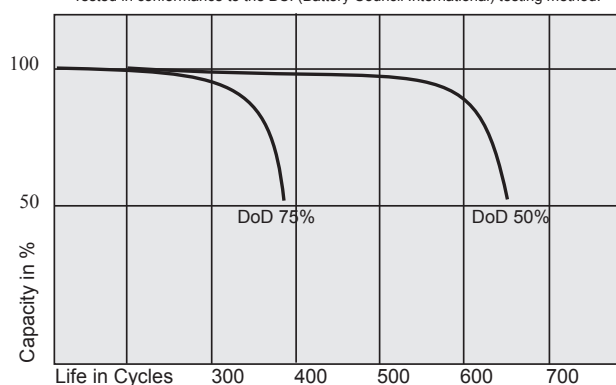

### Battery Charging



- Charging Voltage max 2,4 Vpc (2,65 Vpc <10% Inom), Float charge 2,27 – 2,3 Vpc
- Maximum charging current for MPA 34-12 = 10,2Amp
- Minimum charging current for MPA 34-12 = 3,4Amp

### Cycle life



- To maximise the cycle life of the battery, we recommend to charge the battery fully after use.
- The total cycle life is very dependent on the correct charge and depth of discharge (DoD)!