

APPLICATIONS

Powerchairs / home mobility equipment
Scooters, 3- and 4 wheels
Toys for children
Lifts (stairs / bathrooms)
Personal Carriers
Utility Vehicles

SPECIFICATIONS

Nominal Voltage		12V
Nominal capacity @20 hour rate		12Ah
Capacity at 25°C	10 hour rate	11Ah
	5 hour rate	10Ah
	1 hour rate	6,8Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)		approx. 11 mΩ
Operating temperature for (dis)charge		-15°C to + 40°C

DIMENSIONS



Dimensions LxWxH (T) in mm	151x98x93 (98)
Weight	4kg (±2%)
Separator	AGM, Glass Mat
Case and cover	ABS (UL94-V0 optional)
Terminal	Faston F2 (6,35mm)
Torque setting (recommended)	n.a.
Maximum allowable torque value	n.a.

CHARGING

Charging Voltage cycle use 14,4 to 15 Volt
Float charge Voltage 13,5 to 13,8 Volt
Charging current, minimum 1,2A - maximum 3,6A


CYCLE LIFE

To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

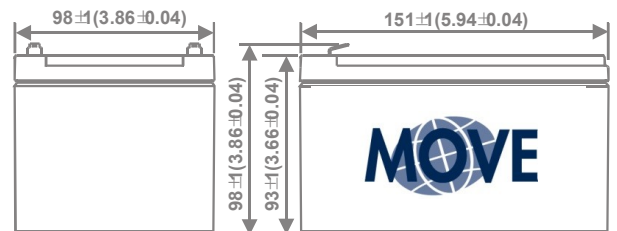

BATTERY LIFE UNDER CYCLIC USE

Tested in conformance to the BCI testing method

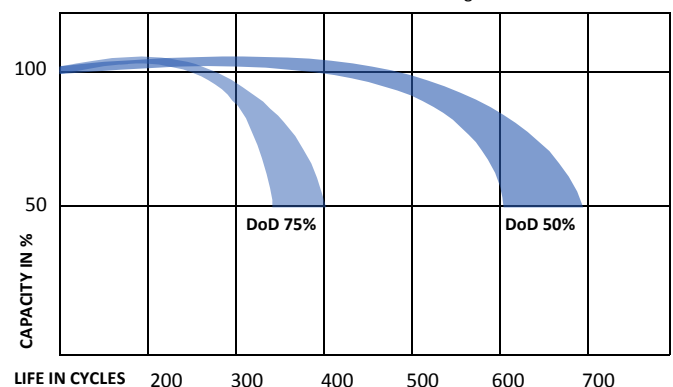

* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn