

PRODUCT FEATURES

Lithium Iron Phosphate Technology
Safe & reliable
Serial connection, max. 4 modules
Long Life Cycle > 1500 cycles
50% lighter then Lead Acid batteries
Special BMS for Safety and Cycle use
UN 38.3 certification - CE Marking

APPLICATIONS

E-Scooters & Bikes (2 / 3 and 4-wheel)
Material Handling Equipment
Low Speed Vehicles
Children's Toys
Lifts

SPECIFICATIONS

LFP Prismatic Cells	8x 3,2V
Nominal Voltage	25,6V
Capacity	50Ah
Nominal Energy	1280Wh
Max. charge voltage	29,2V (29,2 / 43,8 / 58,4V)
Discharge cut-off voltage	20V (18 / 27 / 36V)
Max. charge current	1C = 25 Amp
Max. continous discharge current	50 Amp
Max. peak (3 sec.) discharge current	150 Amp
Operating temperature	-15°C to + 55°C
Storage temperature	-10°C to + 40°C

NOT SERIE CONNECTION, TO BE USED IN PARALLEL

DIMENSIONS


Dimensions LxWxH in mm	318 x 166 x 215
Weight	12kg (±2%)
Case and cover	ABS
Terminal	M8 Bolt

CHARGING


Recommended charging voltage	14,0 ~ 14,6V
Recommended charging current	20 - 25 Amp
Charge temperature	0°C to + 45°C




Different Temperature Discharge Curve @0.5C

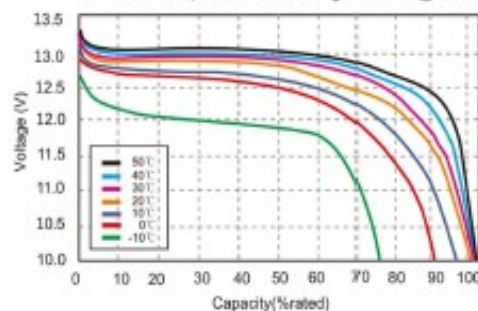


Charging Characteristics @0.5C 25°C

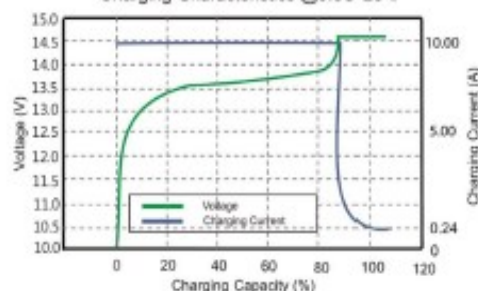

State of Charge Curve @0.5C 25°C

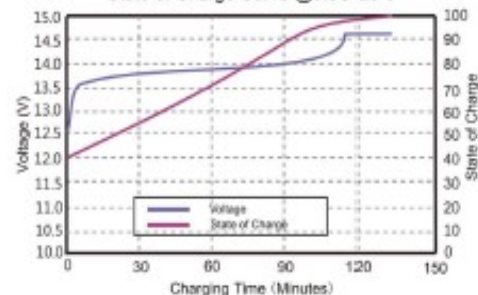

Different Temperature Self Discharge Curve

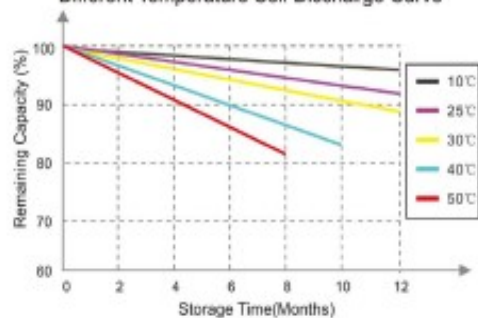

CYCLE LIFE

To 90% C with 100% DoD >1500

To 80% C with 80% DoD >3000

