




DOCTOR CHARGE 50 230V 6V/12V/24V

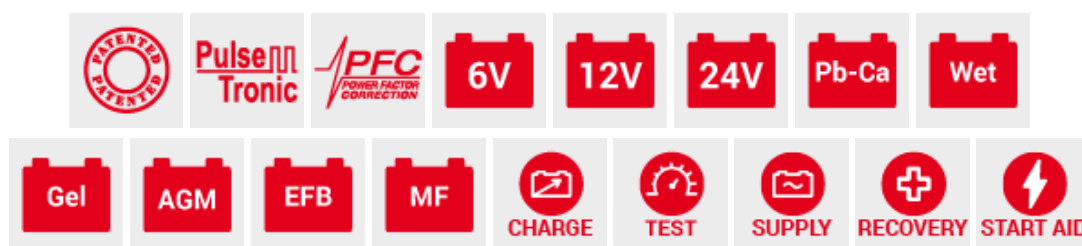

Overview

DOCTOR CHARGE 50 230V 6V/12V/24V

cod. 807586

Electronic BATTERY MANAGER for total maintenance of WET, GEL, AGM, MF, SPIRAL, START-STOP batteries at 6/12/24V and for support activities when intervening on vehicles in workshops, repair shops and car dealer premises.

The innovative Power Stream technology guarantees better performance, up to 50% more than traditional battery chargers. The Pulse Tronic technology guarantees optimal battery charging over 8 phases.

Doctor Charge 50 carries out 5 functions:

1. automatic charge and maintenance of batteries with PULSE TRONIC technology, even in difficult environmental conditions (low temperatures);
2. battery tests such as voltage at terminals, starting capacity (CCA) and operational check of the vehicle alternator;
3. recovery of sulphated or very discharged batteries, and recovery of optimal operation with periodic regeneration;
4. stable power supply source for battery changes (to protect the on-board electronics), for diagnostic activities (operation checks carried out on the vehicles), for keeping the batteries of display vehicles in showrooms operational;
5. vehicles start aid.

Based on the SMPS (Switch Mode Power Supply) Technology. In case of black-outs or repetitive uses Doctor Charge 50 can set itself at the last settings carried out, furthermore the cables can be calibrated according to their type (different lengths and/or sections). Many protections available. Fit with PFC device.



1 PH 230V



MOTORCYCLE



CAR



BOAT



TRACTOR



SMALL VAN



EXCAVATOR



VAN



CE MARKING



DOCTOR CHARGE 50 230V 6V/12V/24V

















EAC CERTIFICATION

IM2725.gif



TÜV SUD CERTIFICATION

Technical data

 CODE	CODE 807586	 V_{PH}	MAINS VOLTAGE 230 V - 1 ph 50/60Hz	 P	CHARGING ABSORBED POWER 600 W
 CHARGING VOLTAGE	6 / 12 / 24 V	 A_{EFF}	EFFECTIVE CHARGING CURRENT 45 / 45 / 23 A	 A_{EN}	RATED CHARGE CURR. EN60335-2-29 40 / 40 / 20 A
 A_{1V/C}	START CURRENT 1V/C EN60335-2-29 70 A	 C_{MIN/MAX}	MIN./MAX RATED REFERENCE CAPACITY 10 A - 600 h15h		ADJUSTMENT POSITIONS 7
 W/H/L	DIMENSIONS 33 - 10 - 16 cm	 kg	WEIGHT 3,7 kg	 BAR CODE	EAN CODE 800489795904 7
 PIECES/PALLET	99 pz/pallet		PIECES/PALLET - B 88 pz/pallet - B		

Included Accessories

P./N. CABLES + CLAMPS 3 M - 124874